




- Split core for easy installation
- Compact design
- Available in primaries from 100A to 600A
- 5A Secondary
- 1m Lead length
- Clear arrow marking to ensure correct installation
- Wire colour: White – S1 | Black – S2

Specification

Primaries	100A to 600A
Secondary	5A
Aperture	36mm
Accuracy Class	Class 1
Burden	1.2VA
Lead Length	1m
Operating Temperature	-15°C to +40°C
Flame Retardant Properties	UL 94V-O
Rated Voltage	660V
Insulation Voltage	2KV
Rated Frequency	50 – 60Hz
Certification	CE

Dimensions

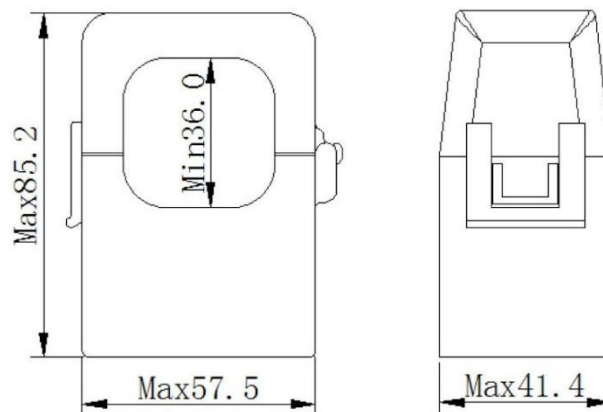

Models

Part Code	Ratio
VCT36-100-5	100/5A
VCT36-150-5	150/5A
VCT36-200-5	200/5A
VCT36-250-5	250/5A
VCT36-300-5	300/5A
VCT36-400-5	400/5A
VCT36-500-5	500/5A
VCT36-600-5	600/5A